

341/10.98

® **WallGard**

# GRAFFITI REMOVER GEL

## GEL DETERGENT FOR CLEANING GRAFFITI-DAMAGED SURFACES

### WHERE TO USE

Cleaning of all surfaces not previously treated with graffiti-resistant protection against conventional spray-paints.

### Typical applications

Removal of graffiti from:

- all types of natural stone facings;
- brick or concrete block facings;
- concrete facings;
- unpainted renders;
- unpainted metal surfaces;

- areas where high-pressure cleaning is not practical.

### TECHNICAL CHARACTERISTICS

WallGard GRAFFITI REMOVER GEL is a gel detergent.

WallGard GRAFFITI REMOVER GEL removes all types of graffiti without damaging the underlying surface simply by spraying with a high pressure cleaner.

Its gelatinous consistency enables WallGard GRAFFITI REMOVER GEL to remain on the surface of the graffiti

without transporting the stain beneath the surface.

WallGard GRAFFITI REMOVER GEL works in 5 to 10 minutes, after which time it can be removed with water.

### RECOMMENDATIONS

- Do not dilute WallGard GRAFFITI REMOVER GEL with solvents or water.
- Do not use WallGard GRAFFITI REMOVER GEL to remove residues and adhesives from the substrate.



*Applying WallGard GRAFFITI REMOVER GEL with a brush*

- Do not use WallGard GRAFFITI REMOVER GEL to remove dirt deposited by smog.
- Do not use WallGard GRAFFITI REMOVER GEL on painted surfaces.

### HOW TO USE

#### Preparing the substrate

No preparation is required.

#### Preparing the product

WallGard GRAFFITI REMOVER GEL is

ready to use and should not be diluted with water or solvents.

### Applying the product

Apply WallGard GRAFFITI REMOVER GEL with a brush onto the graffiti or drawing. Let stand 5 to 10 minutes and then remove the gel with a high-pressure cleaner.

In areas where using a high-pressure cleaner is not practical, WallGard GRAFFITI REMOVER GEL can be removed with tap water and a stiff-bristled brush. Repeat the



Cleaning with an abrasive pad



Cleaning with running water



Using a high-pressure cleaner




Applying WallGard GRAFFITI REMOVER GEL on natural stone

### TECHNICAL DATA:

Consistency:	liquid gel
Colour:	yellow
Specific gravity:	0.85
Storage:	12 months in original sealed packaging
Health hazard EC L. 88/379:	yes. Irritant to skin and eyes
Inflammability:	no
Customs class:	3814 00 90

### APPLICATION DATA

Waiting time before removing:	5 to 10 minutes at 20°C
Application temperature range:	+8°C to +35°C
Coverage:	100 to 200 g/m <sup>2</sup>

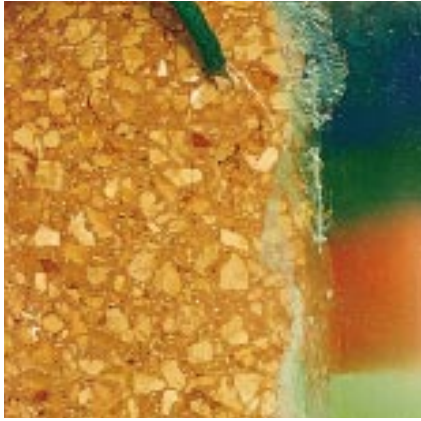

Rinsing graffiti away after scrubbing surface with WallGard GRAFFITI REMOVER GEL and brush

operation if the results are unsatisfactory. Rinse the treated surface thoroughly with water.

#### **Cleaning**

Brushes can be cleaned with water.

#### **COVERAGE**

100 to 200 g/m<sup>2</sup> per coat, depending on the texture of the surface.

#### **PACKAGING**

5-kg buckets.

#### **STORAGE**

12 months in a cool, dry place in original sealed packaging.



#### **WARNING**

*N.B. Although the technical details and recommendations contained in this report correspond to the best of our knowledge and experience, all the above information must, in every case be taken as merely indicative and subject to confirmation after long-term practical applications; for this reason, anyone who intends to use the product must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product.*

**N.B. FOR PROFESSIONAL USE ONLY**



MAPEI QUALITY SYSTEM



MAPEI - ITALY



MAPEI - FRANCE



MAPEI INC - CANADA



MAPEI KTF - HUNGARY



BUILDING THE FUTURE